


LED Track Light ZOOM SLIM Datasheet




Number of heads	1
Mounting	Track mounting
Lamps description	LED 20W, 30W 2500-6000K CRI >90+
Luminaire luminous flux	80/90 W/lm
Voltage (V)	220/240
Environment	Indoor
Notes	Track light ZOOM SLIM driver is located inside the thin luminaire adapter. The lens is adjustable from 15 to 60 degrees and that makes it a perfect luminaire for commercial spaces.

LED light to be installed on 3-phase 4 wire track.



- White
- Black

Dimensions: 225 x Ø70mm

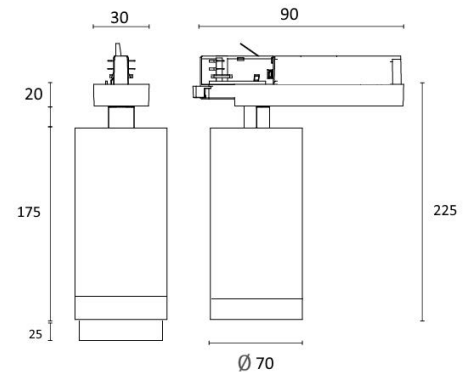

OPTICAL

Reflector finish	Aluminum
Aiming	Adjustable 350 degrees
Light distribution symmetry	Symmetric
Beam angle	15°- 60°
Color temperature	2500-6000K

ELECTRICAL

Wattage Transformer mounting	20W, 30W Integral
Transformer type	Electronic
Frequency	50-60HZ
Voltage	110-240V AC

PHYSICAL

Spot diameter (mm)	Ø 70
Construction material	6063 ALU
Weight (kg)	1,6
Luminaire lifespan	50 000h
LED module	PHILIPS/BRIDGELUX COB LED 100Lm/W
Driver	Flicker free, PHILIPS SLIM, ALL-LOOKING Optional drivers: DALI, DIM
Working temperature	Operation: -30 to +40 °C

CERTIFICATIONS

